

OLE (UK)LTD

Instrumentation Engineering
www.oleuk.com E-mail sales@oleuk.com

Barns A & B Bowley Farm Estate
South Mundham Chichester
West Sussex PO20 1NB
Tel +44 (0)1243 267 930



C2020-A-WWW Shown



C2020-A-WWW-C23

1.0% TANK GAUGE. + Web Viewer.

Features:

**Continuous reading 1% Tank Gauge
No More Climbing on Tanks to dip.**

High & Low Local Alarm (option -A kit)

Bund Alarm Circuit (Float supplied separately)

Output 4-20 mA = 0-100% as standard

Local Calibration settings

Push Button Back light for 1 hour

Flashing Backlight when in Alarm

IP65 Weatherproof Enclosure.

Features:

Auto e-mail XX% level Alarms

Daily e-mail status reports

120 minute web site update 12/day

Easy Installation

Lower sensor into tank, tighten nut, and join 3 wires, plug in and set-up.

A Tank fitting is supplied to fit into a 1" Socket or a special 30 mm bored hole fitting is available (OJ) , providing an IP65 seal.

The Hydrostatic Tank sensors come with cable as shown below. (This can be extended by using an extension kit)

Power requirements/ Options

The Unit operates from 12 to 24 VDC and 100 / 240 vac @50/60Hz.



Input tank sizes on simple screen,

Standard tank options include:
Rectangular,
Horizontal with elliptical ends,

Gauge kits Model	Ranges Fuels		Water		Cable Length
	Min Tank	Max Tank	Min Tank	Max Tank	
C23	0.30 M	3.5 M	0.30 M	3.0 M	7 Meters
C25	2.50 M	5.9 M	2.50 M	5.0 M	10 Meters
C27	5.00 M	11.9 M	5.00 M	10.0M	10 Meters

Typical Applications


GASOIL , DIESEL, KEROSENE,
LUBE OIL, COOKING OIL, GEAR OIL
WATER, ANTI-FREEZE, ADBLUE , WINDSCREEN WASH



Options

B8 = Bund Alarm Probe
OJ = Tank fitting expanding type
for 30 mm bored hole.
C2020-EK= 9 meter extension kit



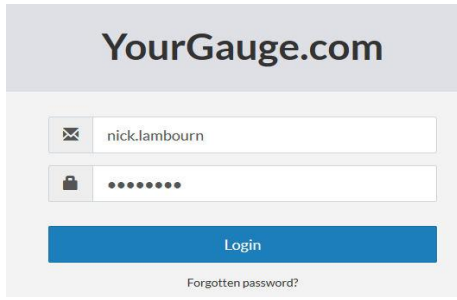

Simple Web Viewer

www.yourgauge.com

(Demo)


User Name XXXX

'test'


Password XXXX

'test'



Depending upon access levels, you can now see, all Customers, all Sites, or just all Tanks

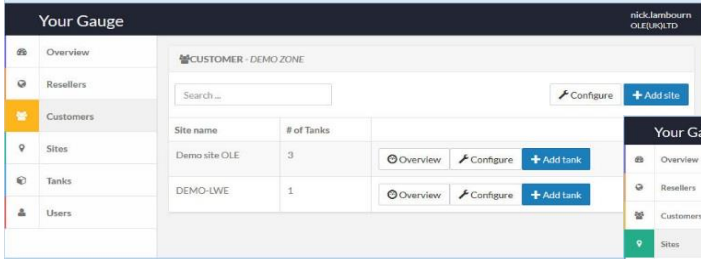


Customer Level Overview

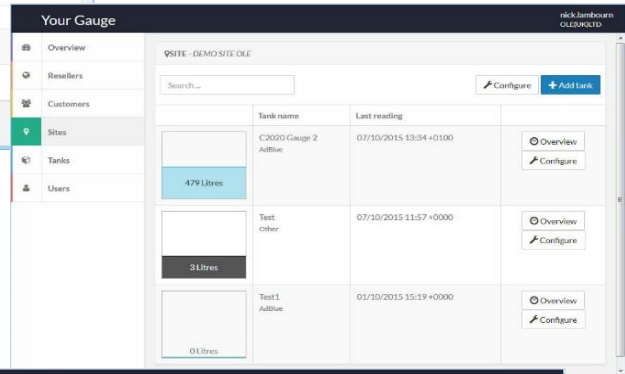


Simple GRAPH View

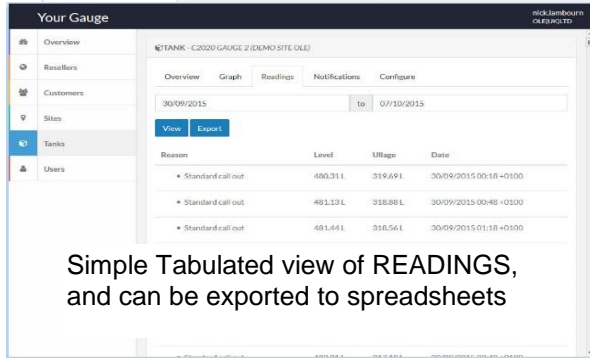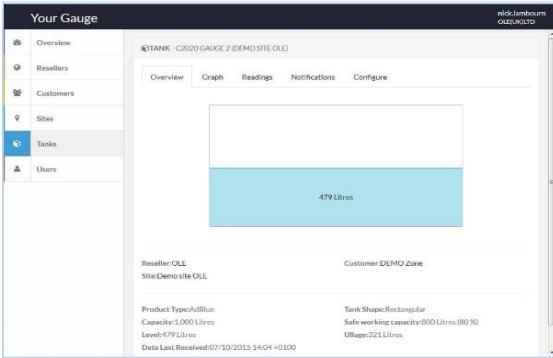

Simple Tabulated view of READINGS, and can be exported to spreadsheets

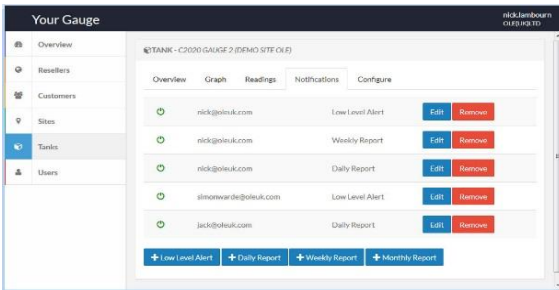

E-mail multiple recipients Daily Report, Weekly, Monthly, as well as % Trigger setting for Low Level Alerts (As many as you need).

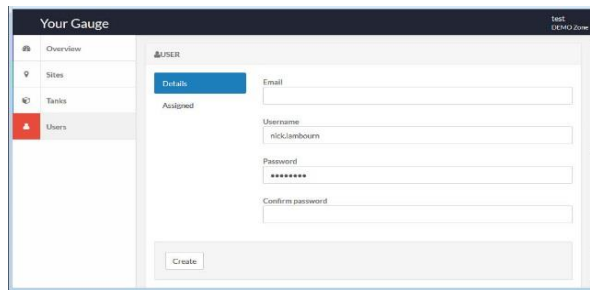

User set-up is simple at either Tank level, site level, or customer level.

www.yourgauge.com allows you to access your sites based on password control. If you have multiple clients, they can only access their specific sites, and specific sites can access their tank data.